


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty*

## U-SERT® TOOLS

O.E.M. Hardware Inc. presents a rugged high speed installation tool for our U-sert® line. This tool is lightweight and completely portable. This particular tool has been used in the market place for many years and has received universal acclaim for it's durable construction and reliable performance.

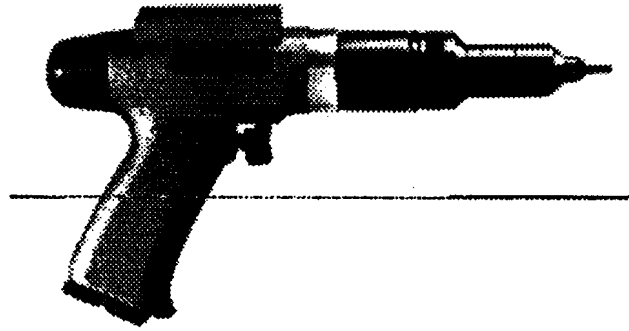


| Part No. | Standard U-sert Capacity | Height         | Length          | Weight               | RPMs | Air Pressure Requirements                                 |
|----------|--------------------------|----------------|-----------------|----------------------|------|---|
| 795-200  | 1/4-XX                   | 5.75"<br>146mm | 12.75"<br>324mm | 3lb. 14oz<br>1.77 kg | 1000 | 70-100 lb/in <sup>2</sup><br>4.92-7.04 kg/sm <sup>2</sup> |

**TOOLS**

**THE FASTEST, MOST RELIABLE INSERT TOOL IN THE WORLD**

**MADE TO LAST A LIFETIME**

- WORKS JUST LIKE A RIVET GUN
- REPLACEMENT PARTS AVAILABLE
- GUARANTEED BY O.E.M. HARDWARE
- LIFETIME WARRANTY\*

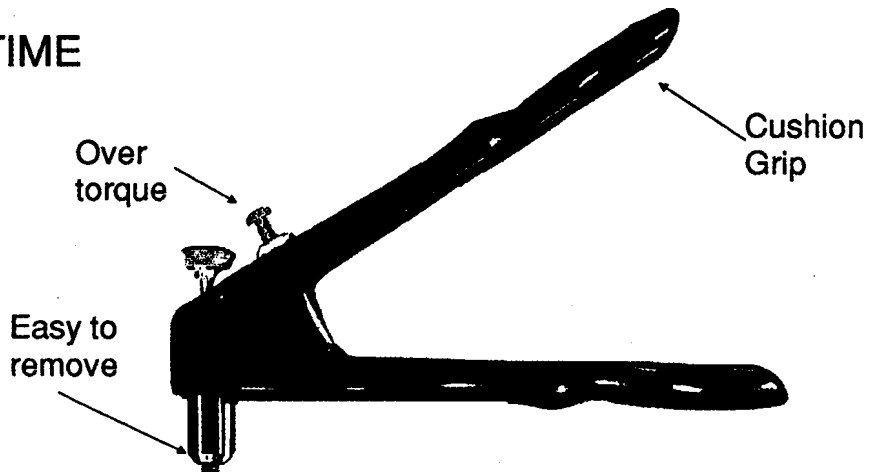

Part No. 50404 (B)

Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was intended.


# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty*

## RIVET TOOLS

### PNEUMATIC PLACING TOOL MODEL 795-734

Model 734 is a lightweight hydraulic-pneumatic production riveting tool. It has been developed to permit rapid, uniform installation of all 1/8" and 3/16" rivets and eliminate the need for special operator training or skills. Model 795-734 has been used in the metal working industry for many years and enjoys universal acceptance because of its durable construction and reliable performance. Its versatility is increased by its capacity to place all conventional aluminum and steel breakstem rivets of 1/8" through 3/16" diameters. Model 795-734 requires minimum maintenance and operates from a standard air supply of 70-100 p.s.i.

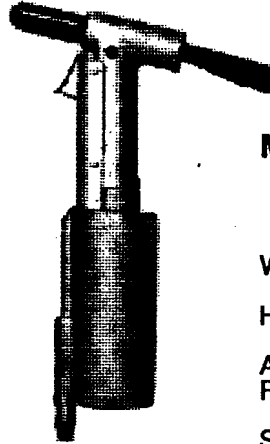


### MODEL 795-734 SPECIFICATIONS

|                         |            |                              |
|-------------------------|------------|------------------------------|
| Weight                  | 3.3 lbs    | 1.5kg                        |
| Height                  | 12.4"      | 315mm                        |
| Air Line Pressure Reg's | 70-100 psi | 4.92-7.04 kg/cm <sup>2</sup> |
| Std. Nose Assy Dim's    |            |                              |
| Length:                 | 2.30"      | 58.4mm                       |
| Diameter:               | .890"      | 22.6mm                       |

THE FASTEST, MOST RELIABLE RIVET TOOL IN THE WORLD

MADE TO LAST  
A LIFETIME  
WILL INSTALL ALL  
TYPES OF RIVETS  
FROM 1/8 TO 3/16

- Lifetime Warranty\*

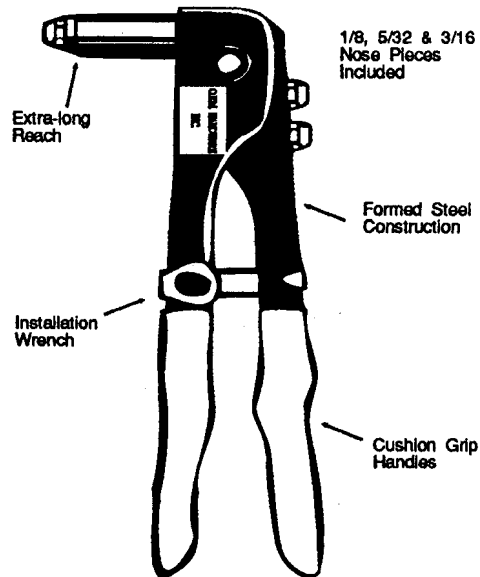

135 (b)

Will pull All Materials

\*Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was intended.

# O.E.M. HARDWARE

*"Hard to Find Fasteners Our Specialty"™*

## PNEUMATIC RIVET TOOLS



O.E.M Hardware's Genesis series of riveting tools are ergonomically designed and light weight. The weight of the tools makes them ideal for assembly line production. The light trigger action compiled with smooth response reduces operator fatigue and increases production. In addition , operator safety is enhanced with air shut-off devices.

**G1** -Model# 71200-0039 is provided complete with 1/8" and 5/32" nose tips and vacuum extraction.

**Weight** 2.5 lbs. (1.13kg.)  
**Pull force** 940 lbf. (4.2kN)  
**Stroke** .560" (14mm)

**G2** -Model# 71200-00039 is provided complete with 1/8" , 5/32" and 3/16" nose tips and vacuum extraction.

**Weight** 3.2 lbs. (1.45 kg.)  
**Pull force** 1618 lbf. (7.2 kN)  
**Stroke** .670" (17mm)

**G3** -Model# 71220-00201 is provided with a universal three jaw set-up allowing for the placement of 1/8" through 1/4" Heavy Duty Rivets.

**Weight** 3.6 lbs. (1.63 kg.)  
**Pull force** 2518 lbf. (11.2 kN)  
**Stroke** .984" (25mm)

\*Call office for pricing and delivery.

**TOOLS**  
**PNEUMATIC**




# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty*


## RIVET TOOLS

### QUICK SET RIVETER FOR PLASTIC RIVETS 100503

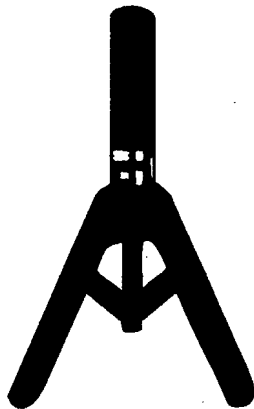

#### COMPETITIVE ADVANTAGES

- SETS ALL PLASTIC RIVETS WITH ONE NOSEPIECE AND IN A SINGLE STROKE.
- PLASTIC RIVET MANUFACTURERS RECOMMENDED THE USE OF THIS TOOL OVER ANY OTHER MANUAL TOOL.
- PATENTED DESIGN SETS THE RIVET PROPERLY EVERY TIME WITH ONE STRAIGHT PULL. DOES NOT BEND THE RIVET STEM CAUSING PREMATURE BREAKAGE.
- TOOL FACES STRAIGHT ON TO WORK SURFACE.
- COMPOUND LEVERAGE ARMS.

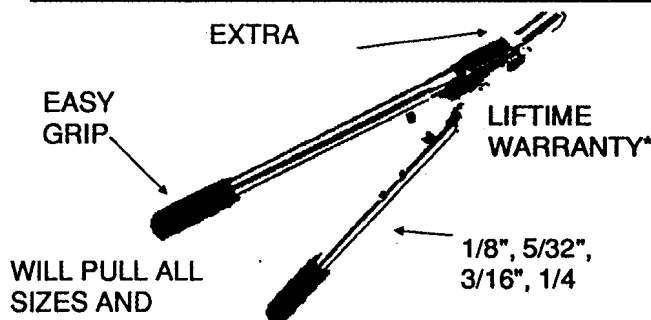


### HEAVY DUTY RIVET TOOL

|                                    |        |   |
|------------------------------------|--------|---|
| HEAVY DUTY RIVET GUN               | 100500 | B |
| 3/16" H.D. Nose Piece for H.D. gun | 100345 | B |
| 1/4" H.D. Nose Piece for H.D. gun  | 100350 | B |

\*Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was

## ULTRALOCK® PNEUMATIC TOOL

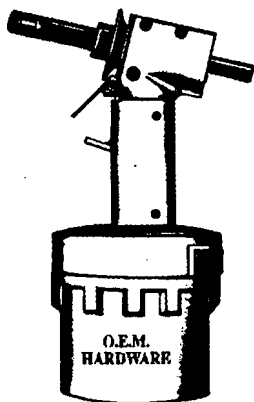

#### ULTRALOCK PNEUMATIC TOOL

795-750-set one size (3/16")

795-751-set one size (1/4")


Sturdy, yet light weight, this tool will install 3/16" and 1/4" diameter ultralocks.




# Solid/Semi-Tubular Rivet Tools

Hand and Powered Riveting Tools

TUBULAR RIVET SETS

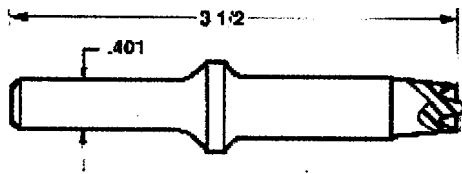

SOLID RIVET SETS

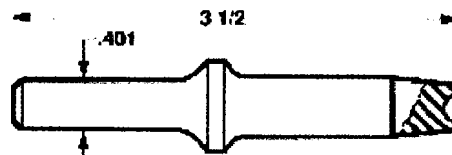


| Rivet Size | Part Number |
|------------|-------------|
| 1/16       | 4502        |
| 3/32       | 4503        |
| 1/8        | 4504        |
| 5/32       | 4505        |
| 3/16       | 4506        |
| 1/4        | 4508        |
| 5/16       | 45010       |

| Description          | 1/16 | 3/32 | 1/8  | 5/32 | 3/16 | 1/4  |
|----------------------|------|------|------|------|------|------|
| Round - AN430        | 4302 | 4303 | 4304 | 4305 | 4306 | 4308 |
| Flat - AN442         | 4422 | 4423 | 4424 | 4425 | 4426 | 4428 |
| Brazier - AN455      | 4552 | 4553 | 4554 | 4555 | 4556 | 4558 |
| Mod. Brazier - AN456 | 4562 | 4563 | 4564 | 4565 | 4566 | 4568 |
| Universal - AN470    | 4702 | 4703 | 4704 | 4705 | 4706 | 4708 |

# O.E.M. HARDWARE

HARD TO FIND FASTENERS OUR SPECIALTY


## HAND RIVET SQUEEZERS

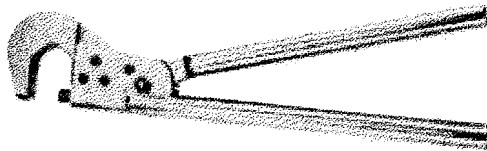

| MODEL  | RIVET CAPACITY  | YOKE REACH | YOKE GAP | LENGTH  | WEIGHT    |
|--------|-----------------|------------|----------|---------|-----------|
| TP-116 | 3/32 thru 3/16" | 1-1/4"     | 1-1/4"   | 14"     | 2-1/2 LBS |
| TP-888 | 3/32 thru 3/16" | 2"         | 1-1/4"   | 16-1/2" | 5 LBS.    |


## PNEUMATIC RIVETERS

TP 114TC SQUEEZER

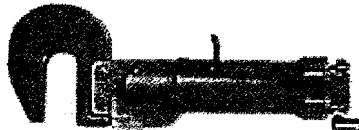

- 3/16" Aluminum Capacity
- 5/32" Steel Capacity
- 1-1/2" Reach
- 1-1/4" Gap
- 5-1/2 lbs.

4X RIVET GUN



### Comes With:

- Retainer Spring & Regulator
- 1740 Blows/Minute
- .401 Shank Diameter
- 1/4" Aluminum Rivet Capacity
- 3/16" Steel Rivet Capacity
- 1/2" Bore/3-1/16" Stroke
- 8-5/16" Length
- 2-3/4 lbs.

Stockton Industries Inc


#103-12779-80 Ave. Surrey, British Columbia, Canada, V3A 6C1

Phone 1-604-591-1100 Fax 1-604-591-8133 E-mail: sales@oem2fasten.com

# O.E.M. HARDWARE


*Hard to Find Fasteners Our Specialty*

## WALLGRIP® TOOL




1

Push fastener into pre-drilled hole.




2

Slip Grip-Quick Wall tool over screwhead.



3

Then simply squeeze the handle until the fastener is

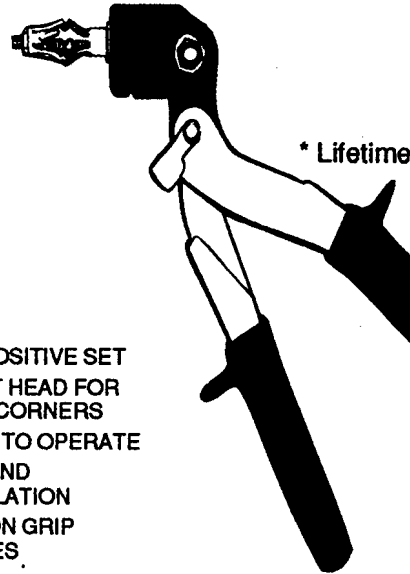

\* Lifetime Warranty

- FAST POSITIVE SET
- OFFSET HEAD FOR USE IN CORNERS
- SIMPLE TO OPERATE
- ONE HAND INSTALLATION
- CUSHION GRIP HANDLES

Part No.  
795-080  
(B)

\*Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was

## ALLOY HEX KEYS



| SIZE | SHORT ARM | LONG ARM |   |
|------|-----------|----------|---|
| .028 | 785-      |          | D |
| .035 | 785-300   |          | D |
| .050 | 785-302   | 785-344  | D |
| 1/16 | 785-304   | 785-346  | D |
| 5/64 | 785-306   | 785-348  | D |
| 3/32 | 785-308   | 785-350  | D |
| 7/64 | 785-310   | 785-352  | D |
| 1/8  | 785-312   | 785-354  | D |
| 9/64 | 785-314   | 785-356  | D |
| 5/32 | 785-316   | 785-358  | D |
| 3/16 | 785-318   | 785-360  | D |
| 7/32 | 785-320   | 785-360  | B |
| 1/4  | 785-322   | 785-364  | B |
| 5/16 | 785-324   | 785-366  | B |
| 3/8  | 785-326   | 785-368  | B |
| 7/16 | 785-328   | 785-370  | B |
| 1/2  | 785-330   | 785-372  | B |
| 9/16 | 785-332   | 785-374  | B |
| 5/8  | 785-334   | 785-376  | B |
| 3/4  | 785-336   | 785-378  | B |
| 7/8  | 785-338   | 785-380  | B |
| 1"   | 785-340   | 785-382  | B |

For Alloy Hex key Sizes please see H-8


## HEX KEY SETS

| Part No. |   |
|----------|---|
| 785-384  | 6 Short Arm Keys<br>Sizes: .028, .035, .050, 1/16, 5/64, 3/32   |
| 785-386  | 7 Short Arm Keys<br>Sizes: 5/64, 3/64, 1/8, 5/32, 3/16, 7/32, 1/4   |
| 785-388  | 11 Long Arm Keys<br>Sizes: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8                              |
| 785-390  | 9 Short Arm Keys<br>Sizes: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4   |
| 785-392  | 15 Short Arm Keys<br>Sizes: .028, .035, .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8     |
| 785-394  | 16 Short Arm Keys<br>Sizes: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8, 1/2, 9/16, 5/8 |
| 785-396  | 16 Long Arm Keys<br>Sizes: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16,                                       |

# O.E.M. HARDWARE


*Hard to Find Fasteners Our Specialty*

## POWER DRIVERS




### Square Driver (Robertson) Power Bits 1/4" Hex Shank Hardened Steel

|            | R00 | R0 | R1     | R2     | R3     |
|------------|-----|----|--------|--------|--------|
| 1" overall |     |    | 516567 | 516568 | 516569 |
| 2" overall |     |    | 516600 | 516605 | 516610 |
| 3" overall |     |    | 516615 | 516620 | 516625 |
| 6" overall |     |    | 516630 | 516635 | 516640 |



### Philips Power Bits 1/4" Hex Shank Hardened Steel

|            | #00 | #0 | #1      | #2      | #3      |
|------------|-----|----|---------|---------|---------|
| 1" overall |     |    | 54592   | 54593   | 54596   |
| 2" overall |     |    | 795-115 | 795-601 | 795-117 |
| 3" overall |     |    | 795-118 | 795-603 | 795-119 |
| 6" overall |     |    | 795-116 | 795-110 | 795-111 |




### Hex Key (Allen™) Power Bits 1/4" Hex Shank Hardened Steel

|            | 5/64"   | 3/32"   | 1/8"    | 5/32"   | 3/16"   |
|------------|---------|---------|---------|---------|---------|
| 1" overall | 795-225 | 795-227 | 795-229 | 795-231 | 795-232 |
| 2" overall |         |         |         |         | 795-233 |
| 6" overall |         |         |         |         |         |



### Square Driver/Square Driver Double ended Twin Bits 1/4" Hex Shank Hardened Steel

|            | R0/R3 | R1/R2   | R2/R2 | R2/R3 |
|------------|-------|---------|-------|-------|
| 3" overall | p/n   | 795-216 | p/n   | P/N   |
| 6" overall | p/n   | 795-517 | p/n   | P/N   |



### Phillips/Phillips Double ended Twin Bits 1/4" Hex Shank Hardened Steel


|            | #1/#2   | #2/#2 | #2/#3 |
|------------|---------|-------|-------|
| 3" overall | 795-218 | p/n   | p/n   |
| 6" overall | 795-519 | p/n   | p/n   |

TOOLS

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty*

## POWER DRIVERS




### Torx® Power Bits 1/4" Hex Shank Hardened Steel

|            | T10   | T15   | T20   | T25   | T30   | T40   |
|------------|-------|-------|-------|-------|-------|-------|
| 1" overall | 12472 | 12100 | 12101 | 12103 | 12104 | 12105 |
|            |       |       |       |       |       |       |
|            |       |       |       |       |       |       |




### Drywall Screw Setter 1/4" Hex Shank Hardened Steel

|            | #2"     |  |  |  |  |
|------------|---------|--|--|--|--|
| 1" overall | 795-120 |  |  |  |  |
|            |         |  |  |  |  |
|            |         |  |  |  |  |



### Magnetic Nut Setters 1/4" Hex Shank Chrome Vanadium Molybdenum

|            | 1/4"    | 5/16" | 3/8"    | 7/16"   |  |
|------------|---------|-------|---------|---------|--|
| 2" overall | 22405   | 51293 | 795-202 | 795-221 |  |
| 6" overall | 795-165 | P/N   | P/N     | 795-166 |  |
|            |         |       |         |         |  |
|            |         |       |         |         |  |




### Magnetic Power Bit Holder 1/4" Hex Shank Hardened Steel

| Holds 1/4" Power Bits |       |  |  |  |  |
|-----------------------|-------|--|--|--|--|
|                       | 1/4"  |  |  |  |  |
| 2" overall            | 22407 |  |  |  |  |
|                       |       |  |  |  |  |
|                       |       |  |  |  |  |

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty*

## TAMPERPROOF TOOLS




### O.E.M. Tamperproof Drivers

| SIZE | FOR SCREW     | POWER DRIVER | HAND DRIVER |
|------|---------------|--------------|-------------|
| #4   | #4, 4-40      | 534007       | 534006      |
| #6   | #6, 6-32      | 534031       | 534028      |
| #8   | #8, 8-32      | 534032       | 534029      |
| #10  | #10, 10/24/32 | 534033       | 534030      |

*This Tamper resistant screw is smooth, so it discourages electron discharge and it's electronically safe, making it ideal for use in medical apparatus, food handling and fastening for high voltage apparatus*


Complete Super-fix assortments #8556, #8557, #8558 see section G



### Spanner Tamperproof Drivers

| SIZE | FOR SCREW     | POWER DRIVER | HAND DRIVER |
|------|---------------|--------------|-------------|
| #4   | #4, 4-40      | 795-192      | 795-173     |
| #6   | #6, 6-32      | 795-193      | 795-174     |
| #8   | #8, 8-32      | 795-194      | 795-175     |
| #10  | #10, 10-24/32 | 795-195      | 795-176     |
| #12  | #12, 12-24    | 795-196      | 795-177     |
| #14  | #14, 1/4-20   | 795-197      | 795-178     |


Complete Super-fix assortments 700-132 see section G



### One-Way Tamperproof Removal Drivers

| SIZE | FOR SCREW  | POWER DRIVER | HAND DRIVER |
|------|------------|--------------|-------------|
| 1    | #4 to #8   |              | 795-170     |
| 2    | #10 - #12  |              | 795-171     |
| 3    | #14 (1/4") |              | 795-169     |

Complete Super-fix assortments 700-134 see section G



### Triple-groove Tamperproof Drivers (fits Tri-groove)

| SIZE | FOR SCREW | POWER DRIVER | HAND DRIVER |
|------|-----------|--------------|-------------|
| #4   |           |              |             |
| #6   |           |              | 795-301     |
| #8   |           | 795-305      |             |
| #10  |           | 795-306      |             |
| #20  |           |              |             |
| #30  |           |              |             |

TOOLS

# O.E.M. HARDWARE

*Hard to Find Fasteners Our Specialty*


## TAMPERPROOF TOOLS



### Torx Pin Tamperproof Drivers

| SIZE | FOR SCREW | POWER DRIVER | HAND DRIVER |
|------|-----------|--------------|-------------|
| T-7  |           | 795-252      | 795-240     |
| T-8  |           | 795-253      | 795-241     |
| T-9  |           | 795-254      | 795-242     |
| T-10 |           | 795-203      | 795-243     |
| T-15 |           | 795-204      | 795-244     |
| T-20 |           | 795-205      | 795-245     |
| T-25 |           | 795-206      | 795-246     |
| T-27 |           | 795-207      | 795-247     |
| T-30 |           | 795-208      | 795-248     |
| T-40 |           | 795-209      | 795-249     |
| T-45 |           |              | 795-250     |
| T-50 |           |              | 795-251     |


Complete Super-fix assortments see section G



### Socket Pin Tamperproof Drivers

| SIZE | FOR SCREW             | POWER DRIVER | HAND DRIVER |
|------|-----------------------|--------------|-------------|
| 3/32 | 4-40                  | 795-184      | 795-604     |
| 1/8  | #6, 6-32              | 795-185      | 795-605     |
| 5/32 | #8 to #14, 8, 10, 1/4 | 795-187      | 795-606     |
| 3/16 | 5/16                  | 795-188      |             |
| 7/32 | 3/8                   | 795-189      |             |
| 9/64 | ---                   | 795-186      |             |
| 1/4  | ---                   | 795-190      |             |
| 5/16 | ---                   | 795-191      |             |

Complete Super-fix assortments #700-136 see section G



### Triple-wing Tamperproof Drivers

| SIZE | FOR SCREW | POWER DRIVER | HAND DRIVER |
|------|-----------|--------------|-------------|
| #0   |           |              |             |
| #1   |           |              | 795-301     |
| #2   |           | 795-305      |             |
| #3   |           | 795-306      |             |
| #4   |           |              |             |
| #5   |           |              |             |
| #6   |           |              |             |