

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

SUPER GRIP BLIND RIVETS



ALUMINUM / STAINLESS

STAINLESS / STAINLESS


STEEL / STEEL




- STRONGER
- WILL NOT VIBRATE LOOSE
- AIR AND WATER TIGHT
- FILL OVERSIZE HOLES
- REDUCE INVENTORY

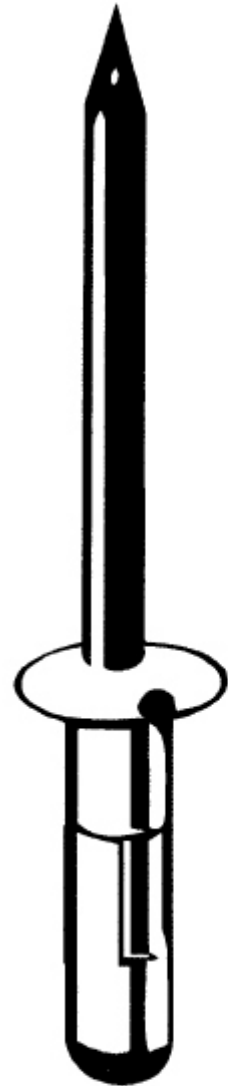

1. An Super Grip rivet is inserted in a prepared hole and the placing tool nose is slipped over the stem. When actuated, the pulling jaws grip the stem drawing it into the tool.







2. The stem compresses the shell, initially expanding it into 360° contact with the parent material. When the hole is completely filled, a symmetrical blind side tail forms and a clamping force is exerted from both sides of the work.





3. Finally, the stem separates, and its head remains permanently locked inside the shell, sealing the bore. Installation is then complete, and optimum clamp up and vibration resistance is achieved.

Hard to Find Fasteners Our Specialty

SUPER GRIP BLIND RIVETS

SHELL: 5052 ALUMINUM, PLAIN FINISH STEM: 304 STAINLESS STEEL					
RIVET TYPE	ALUM HEAD STAINLESS STEM	"D" DIA.	"G" GRIP		
DOME HEAD 	780-284	1/8	TO .187	CFA/BCF	10M
	780-285	1/8	TO .312	CFA/BCF	8M
	780-286	5/32	TO .250	CFA/BCF	6M
	780-287	5/32	TO .312	CFA/BCF	6M
	780-288	3/16	TO .250	CFA/BCF	5M
	780-289	3/16	TO .437	CFA/BCF	4M
	780-290	3/16	TO .781	BAA/FA	3M
LARGE FLANGE 	780-291	3/16	TO .250	BAA/FA	3M
	780-292	3/16	TO .500	BAA/FA	2M
	780-283	3/16	TO .781	BAA/FA	2M
RIVET TYPE	STAINLESS HEAD STAINLESS STEM	"D" DIA.	"G" GRIP		
DOME HEAD 	780-273*	1/8	.039-.118	CFA/BCF	5M
	780-275*	1/8	.118-.197	CFA/BCF	5M
	780-277*	1/8	.197-.276	CFA/BCF	5M
	780-280*	5/32	.039-.118	CFA/BCF	5M
	780-281*	5/32	.118-.197	CFA/BCF	5M
	780-282*	5/32	.197-.276	CFA/BCF	5M
	780-283*	3/16	.059-.138	CFA/BCF	3M
	780-278*	3/16	.138-.236	CFA/BCF	3M
	780-279*	3/16	.236-.334	CFA/BCF	3M
	*OVERSIZE STEM (1/8 USE 5/32 NOSEPIECE) (5/32 USE 3/16 NOSEPIECE) (3/16 USE 1/4 NOSEPIECE)				
RIVET TYPE	STEEL HEAD STEEL STEM	"D" DIA.	"G" GRIP		
DOME HEAD 	780-294	1/8	.044-.156	CFA/BCF	10M
	780-295	5/32	.056-.200	CFA/BCF	6M
	780-296	3/16	.020-.187	CFA/BCF	4M
	780-297	3/16	.156-.250	CFA/BCF	4M

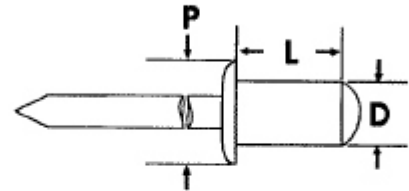

RIVETS

FOR BULK PRICING-CONTACT ORDER DESK


O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

RIVET TOOLS

PNEUMATIC PLACING TOOL MODEL 795-734

Model 734 is a lightweight hydraulic-pneumatic production riveting tool. It has been developed to permit rapid, uniform installation of all 1/8" to 3/16" rivets and eliminate the need for special operator training or skills. Model 795-734 has been used in the metal working industry for many years and enjoys universal acceptance because of its durable construction and reliable performance. Its versatility is increased by its capacity to place all conventional aluminum and steel break stem rivets of 1/8" through 3/16" diameters. Model 795-734 requires minimum maintenance and operates from a standard air supply of 70-100 P.S.I..

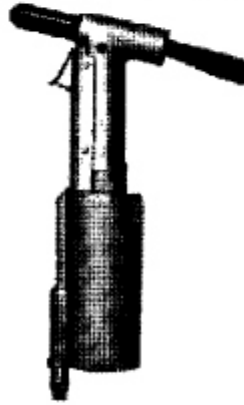

MODEL 795-734 SPECIFICATIONS

Weight	3.3 lbs	1.5kg
Height	12.4"	315mm
Air Line Pressure Reg's	70-100 p.s.i.	4.92-7.04 kg/cm2
Std. Nose Assy Dim's		
Length:	2.30"	58.4mm
Diameter:	.890"	22.6mm


6 MONTH LIMITED WARRANTY

**THE FASTEST, MOST RELIABLE RIVET TOOL
IN THE WORLD**

**MADE TO LAST A LIFETIME
WILL INSTALL ALL
TYPES OF RIVETS**



PRODUCT	PART NO	
SUPER GRIP RIVET GUN	135	B
1/8" Nose Piece for Super Grip Rivet Gun	795-130	B
5/32" Nose Piece for Super Grip Rivet Gun	795-131	B
3/16" Nose Piece for Super Grip Rivet Gun	795-132	B
(REPAIR) REPLACEMENT KIT INCLUDES JAWS, JAW PUSHER, JAW PUSHER SPRING, RETURN SPRING & CIRCLIPS	795-016	B

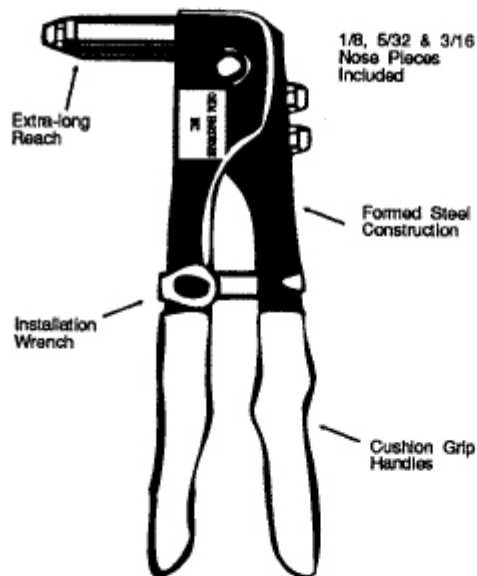

135 (b)










**Will pull All Materials
Including Stainless**

*Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was intended.

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

SUPER GRIP® RIVET ASSORTMENTS

SUPER-FIX ASSORTMENT SUPER GRIP RIVETS & TOOL				No. 7725
				WITHOUT TOOL
				
				
SUPER GRIP				FOR AUTHORIZED SERVICE THE ASSORTMENT SHOULD BE ORDERED BY FOUR DIGIT TECHSPEC LOCAL #11130 148-003455P











7725

SUPER GRIP RIVETS

8 Different Types of the "One and only" Super Grip® Rivets

21 Hole Drawer

781 pieces

SUPER-FIX ASSORTMENT SUPER GRIP RIVETS & TOOL				No. 7730
				 RIVET TOOL
				
				
SUPER GRIP				FOR AUTHORIZED SERVICE THE ASSORTMENT SHOULD BE ORDERED BY FOUR DIGIT TECHSPEC

7730

SUPER GRIP RIVETS w/TOOL

8 Different Types of the "One and only" Super Grip Rivets Comes complete with Super Grip® crimping tool

21 Hole Drawer

782 pieces



RIVETS

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

STANDARD BREAK STEM RIVETS

DOME HEAD



DIA.	GRIP RANGE	RIVET REF #	ALUM RIVET ALUM. MANDREL	ALUM RIVET STEEL MANDREL	STEEL RIVET STEEL MANDREL	STAINLESS RIVET STAINLESS MANDREL	STAINLESS RIVET STEEL MANDRILL	
3/32	.025-.125	32F	780-425 (cfa)	780-444 (cfa)	780-469 (cfa)	780-488 (cfa)	780-512 (cfa)	10m
	.120-.250	34F	780-426 (cfa)	780-445 (cfa)	780-470 (cfa)	780-489 (cfa)	780-513 (cfa)	10m
1/8	.025-.062	41F	780-427 (cfa)	780-446 (cfa)	780-471 (cfa)	780-490 (cfa)	780-004 (cfa)	10m
	.060-.125	* 42F	780-428 (cfa)	780-447 (cfa)	780-472 (cfa)	780-491 (cfa)	780-515 (cfa)	10m
	.120-.187	* 43F	9451 (cfa)	780-449 (cfa)	9441 (cfa)	780-492 (cfa)	9434 (cfa)	10m
	.180-.250	* 44F	780-429 (cfa)	780-450 (cfa)	780-473 (cfa)	780-493 (cfa)	9436 (cfa)	10m
	.245-.312	45F	9453 (cfa)	780-451 (cfa)	9443 (cfa)	780-494 (cfa)	780-516 (cfa)	10m
	.310-.375	* 46F	780-430 (cfa)	780-452 (cfa)	780-474 (cfa)	780-495 (cfa)	780-517 (cfa)	10m
	.370-.500	48F	780-431 (cfa)	780-453 (cfa)	780-475 (cfa)	780-496 (cfa)	780-518 (cfa)	9m
5/32	.025-.125	52F	780-432 (cfa)	780-454 (cfa)	780-476 (cfa)	780-497 (cfa)	780-519 (cfa)	8m
	.120-.250	54F	780-433 (cfa)	780-455 (cfa)	9445 (cfa)	780-498 (cfa)	780-520 (cfa)	8m
	.245-.375	56F	780-434 (cfa)	780-456 (cfa)	780-477 (cfa)	780-499 (cfa)	780-521 (cfa)	6m
	.370-.500	58F	780-435 (cfa)	780-457 (cfa)	780-478 (cfa)	780-002 (cfa)	780-522 (cfa)	6m
3/16	.025-.125	62F	780-436 (cfa)	780-458 (cfa)	780-479 (cfa)	780-501 (cfa)	780-523 (cfa)	5m
	.120-.250	64F	780-437 (cfa)	780-459 (cfa)	780-480 (cfa)	780-502 (cfa)	9438 (cfa)	5m
	.245-.375	66F	9455 (cfa)	780-460 (cfa)	9447 (cfa)	780-503 (cfa)	9440 (cfa)	5m
	.370-.500	68F	9457 (cfa)	780-461 (cfa)	9449 (cfa)	780-504 (cfa)	780-524 (cfa)	4m
	.490-.625	610F	780-202 (cfa)	780-462 (cfa)	780-481 (cfa)	780-505 (cfa)	780-525 (cfa)	4m
	.620-.750	612F	780-438 (cfa)	780-463 (cfa)	780-482 (cfa)			4m
1/4	.125-.250	84F	780-439 (cfa)	780-464 (cfa)	780-483 (cfa)	780-507 (cfa)	780-527 (cfa)	2m
	.245-.375	86F	780-440 (cfa)	780-465 (cfa)	780-484 (cfa)	780-508 (cfa)	780-528 (cfa)	2m
	.370-.500	88F	780-441 (cfa)	780-466 (cfa)	780-485 (cfa)	780-509 (cfa)	780-529 (cfa)	2m
	.495-.625	810F	780-442 (cfa)	780-467 (cfa)	780-487 (cfa)			2m
	.620-.750	812F	780-443 (cfa)	780-468 (cfa)	780-486 (cfa)			2m

FOR BULK PRICING ADD BU TO BEGINNING OF PART NO. (e.g. BU780-425)

* ALSO AVAILABLE IN WHITE, BROWN, OR BLACK. PLEASE ADD P TO BEGINNING OF PART NO. (e.g. P780-425)

LARGE FLANGE



DIA.	GRIP RANGE	RIVET REF #	ALUM RIVET ALUM. MANDREL	ALUM RIVET STEEL MANDREL	STEEL RIVET STEEL MANDREL	STAIN. RIVET STAIN. MANDREL	STAIN. RIVET STEEL MANDRILL	
1/8	.060-.125	42LF	780-532 (cfa)	780-537 (cfa)	780-543 (cfa)	780-549 (cfa)	780-554 (cfa)	10m
	.180-.250	44LF	780-533 (cfa)	780-538 (cfa)	780-544 (cfa)			10m
3/16	.245-.375	66LF	780-199 (cfa)	780-539 (cfa)	780-545 (cfa)	780-550 (cfa)	780-555 (cfa)	3m
	.370-.500	68LF	780-201 (cfa)	780-540 (cfa)	780-546 (cfa)			3m
	.490-.625	610LF	780-535 (cfa)	780-541 (cfa)	780-547 (cfa)	780-552 (cfa)	780-556 (cfa)	2m
	.620-.750	612LF	780-203 (cfa)	780-542 (cfa)	780-548 (cfa)	780-553 (cfa)	780-557 (cfa)	2m

FOR BULK PRICING ADD BU TO BEGINNING OF PART NO. (e.g. BU780-425)



FOR BACK-UP WASHERS PLEASE SEE PAGE C-10

STANDARD BREAK STEM RIVETS


COUNTER-SUNK



DIA.	GRIP RANGE	RIVET REF #	ALUM RIVET ALUM. MANDREL	ALUM RIVET STEEL MANDREL	STEEL RIVET STEEL MANDREL	STAINLESS RIVET STAINLESS MANDREL	STAINLESS RIVET STEEL MANDREL	
3/32	.025-.125	32C						10m
	.120-.250	34C						10m
1/8	.025-.062	41C						10m
	.060-.125	42C	780-564 (cfa)	780-588 (cfa)	780-612 (cfa)			10m
	.120-.187	43C	780-565 (cfa)	780-589 (cfa)	780-613 (cfa)			10m
	.180-.250	44C	780-566 (cfa)	780-590 (cfa)	780-614 (cfa)			10m
	.245-.312	45C						10m
	.310-.375	46C						10m
	.370-.500	48C						10m


FOR BULK PRICING ADD BU TO BEGINNING OF PART NO. (e.g. BU780-425)

ACTUAL SIZE RIVET CHART

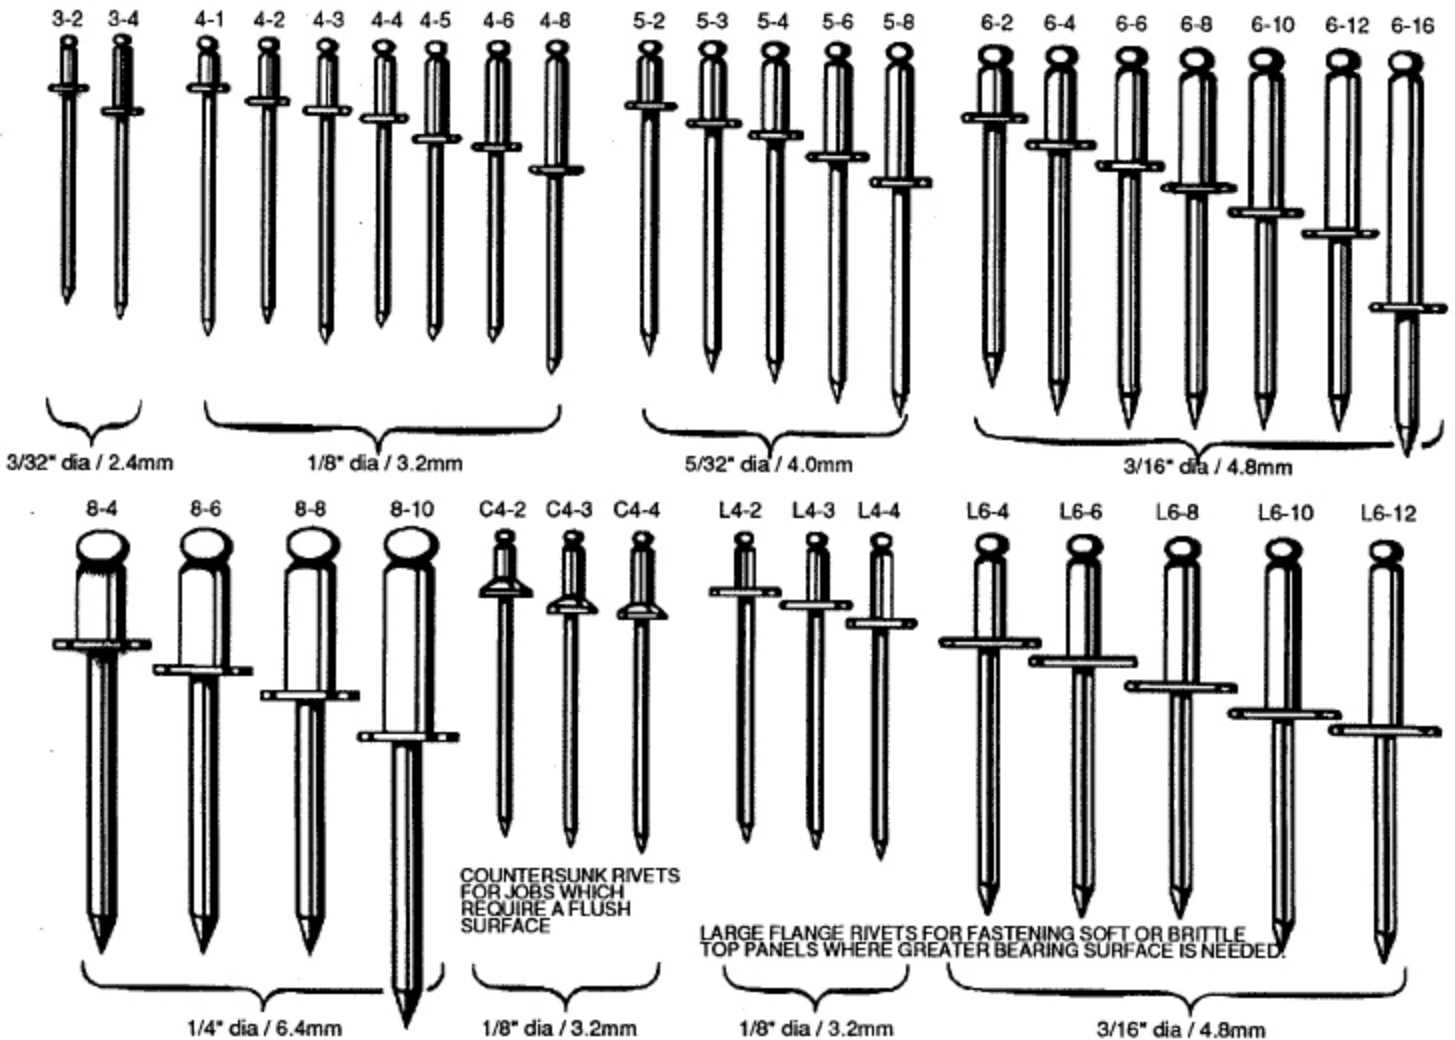


RIVETS

HEAVY DUTY RIVETS



**Vibration Proof
Complete Hole Fill
One side Placing
High Shear
High Clench**

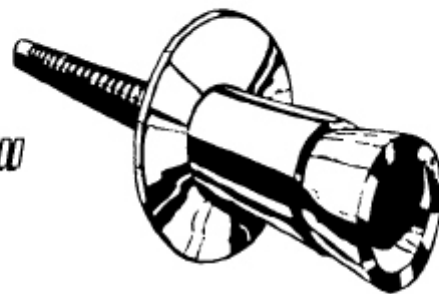

STRENGTHS

SHEAR	2400 lb.
TENSION	2150 lb.
PRE-TENSION	550 lb.
CLAMP-UP	90-150 lb.
STEM PUSH-OUT	250 lb.

- BLIND INSTALLATION, FROM ONE SIDE
- STEM ALWAYS BREAKS FLUSH
- VIBRATION PROOF STRUCTURAL FASTENER
- POSITIVE LOCKED STEM, WATERPROOF TO 80 P.S.I. FROM BOTH SIDES
- WIDE GRIP RANGE WITH HIGH CLENCH
- HIGH STRENGTH, WITH LO-PRO HEAD
- DRY FILM LUBRICANT CAN BE PAINTED

DIA.	GRIP RANGE	MATERIAL	REGULAR HEAD	100° CSK	
3/16	.064-.270	STAINLESS STEEL	9459		CF/BCF
3/16	.214-.420	STAINLESS STEEL	9460		CF/BCF
1/4	.080-.375	STAINLESS STEEL	9461		BCF/FA
1/4	.125-.475	STEEL		780-274	CF/BCF
1/4	.125-.475	ALUM. ALLOY		780-276	CF/BCF
3/16	.064-.270	STEEL	100335		CF/BCF
3/16	.214-.420	STEEL	100340		CF/BCF
1/4	.080-.375	STEEL	100327		CF/BCF
1/4	.350-.625	STEEL	100332		CF/BCF
3/16	.064-.270	ALUM. ALLOY	780-180		CF/BCF
3/16	.214-.420	ALUM. ALLOY	780-185		CF/BCF
1/4	.080-.375	ALUM. ALLOY	780-190		BCF/FA
1/4	.350-.625	ALUM. ALLOY	780-195		BCF/FA

RIVETS

**PNEUMATIC PLACING TOOL
MODEL 795-498**

Model 795-498 is a Heavy Duty hydraulic-pneumatic high production riveting tool. It's robust and well balanced design permits easy and rapid installation of all sizes of aluminum and steel Heavy Duty rivets. Model 795-498 operates on airline pressures of 70 to 100 psi.

MODEL 795-498 SPECIFICATIONS

Weight	3.3 lbs	1.5kg
Height	12.4"	315mm
Air Line Pressure	70-100 psi	4.92-7.04 kg/cm2
Std. Nose Assy Dim's		
Length:	2.30"	58.4mm
Diameter: .890"		22.6mm



LIFETIME WARRANTY*

HEAVY DUTY RIVET TOOL



PRODUCT	PART NO	
HEAVY DUTY RIVET GUN	100500	B
3/16" H.D. Nose Piece for H.D. gun	100345	
1/4" H.D. Nose Piece for H.D. gun	100350	
(REPAIR) REPLACEMENT KIT INCLUDES JAWS, JAW PUSHER, JAW PUSHER SPRING & SET SCREWS	795-017	

*Our products are warranted against defects in workmanship and material, during the normal life of the product. Replacement of any defective part, without charge will be made upon return to place of purchase, freight prepaid. This warranty will be denied if inspection shows that the tool has been damaged, abused, altered, or used for the purposes other than that for which it was intended.

O.E.M. HARDWARE


Hard to Find Fasteners Our Specialty

SIMUBUCK RIVET



PART NUMBER	DESCRIPTION	GRIP	DIA.	DRILL DIA.	NOSE TIP	
780-100	ALUMINUM	1/8	3/16	#11	100350	CFA/BCF
780-105	ALUMINUM	1/4	3/16	#11	100350	CFA/BCF
780-110	ALUMINUM	3/8	3/16	#11	100350	CFA/BCF
780-115	STEEL	1/8	3/16	#11	100350	CFA/BCF
780-120	STEEL	1/4	3/16	#11	100350	CFA/BCF
780-125	STEEL	3/8	3/16	#11	100350	CFA/BCF
780-130	STAINLESS STEEL	1/4	3/16	#11	100350	CFA/BCF
780-135	ALUMINUM CAP		3/16			CFA/BCF
780-140	NICKLE CAP		3/16			CFA/BCF

SKINGRAF RIVET



PART NUMBER	DESCRIPTION	GRIP	DIA.	DRILL DIA.	NOSE TIP	
780-145	ALUMINUM	1/8	3/16	#8	100350	CFA/BCF
780-150	ALUMINUM	1/4	3/16	#8	100350	CFA/BCF
780-155	ALUMINUM	3/8	3/16	#8	100350	CFA/BCF

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

RIVETS



BRAZIER HEAD ALUMINUM		
PART NO	SIZE	
533340	3/16 X 3/8	BAA
533342	3/16 X 1/2	
533344	3/16 X 5/8	
533346	3/16 X 3/4	
533352	1/4 X 1/2	
533354	1/4 X 3/4	
533347	5/16 X 1/2	
533341	5/16 X 3/4	



FLAT HEAD STEEL			
PART NO	Dia	Lgth	
780-400	1/8"	5/16	BAA
533348	3/16"	3/8	
780-403	1/4"	3/8	
780-404	1/4"	1/2	



ROUND HEAD STEEL				
Steel	Aluminum	Dia	Lgth	
780-406	785-406	1/8	3/8	BAA
780-407	780-407	3/16	3/8	
780-408	780-408	3/16	1/2	
780-409	780-409	3/16	1"	
780-410	780-410	1/4	1/2	
533350		1/4	3/4	
780-411		1/4	7/8	

O.E.M. Jiffy Rivets- Just Hit to fit

SINGLE CAPPED STYLE- (eyelet open at bottom)

Actual Size--- Nickel Pltd







Small Cap Size			Medium Cap Size		Large Cap Size	
780-801 1/4" eyelet BAA	780-802 5/16" eyelet BAA	780-803 3/8" eyelet BAA	780-804 1/4" eyelet BAA	780-805 5/16" eyelet BAA	780-806 5/16" eyelet BAA	780-807 7/16" eyelet BAA

Hard to Find Fasteners Our Specialty

ALUMINUM DRIVE RIVETS

WITH STAINLESS STEEL DRIVE-PIN

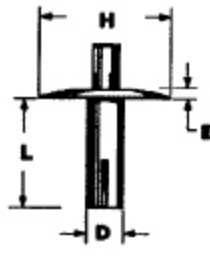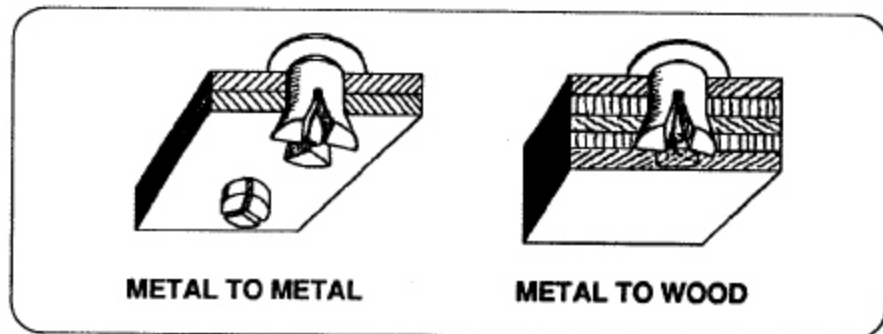

RIVETS

RIVET SIZE SPECIFICATIONS AND HOLE SIZE DATA

NOM. RIVET DIA.	"D"	UNIVERSAL HEAD		BRAZIER HEAD		LINER HEAD		100° FLUSH HEAD	
		"H"	"E"	"H"	"E"	"H"	"E"	"E"	"E"
1/8	.125	.250	.054	—	—	—	—	.216	.042
5/32	.156	.312	.067	—	—	—	—	.278	.055
3/16	.187	.375	.080	.469	.094	.615	.077	.344	.070
1/4	.250	.500	.107	.625	.125	—	—	.467	.095
5/16	.312	.625	.138	—	—	—	—	.594	.125
3/8	.375	.750	.166	—	—	—	—	.718	.156

- Structural—Self-plugging rivets**

Conform to MS24661 & 24662 standards

- EASILY INSTALLED—**

No special tools required...just a hammer

- HIGH SHEAR STRENGTH—**

Rivets are plugged the full length of the rivet sleeve, providing full shear strength values for structural or load bearing applications

O.E.M. HARDWARE

Hard to Find Fasteners Our Specialty

ALUMINUM DRIVE RIVETS

WITH STAINLESS STEEL DRIVE-PIN

"D" RIVET DIA.	"G" GRIP RANGE			"L" Max.	UNIVERSAL HEAD	100° FLUSH HEAD	BRAZIER HEAD	
	Nom.	Min.	Min.					
3/16	1/8	.078	.171	9/32	780-008		780-040	CFA/BCF
3/16	3/16	.140	.234	11/32	780-009		780-041	CFA/BCF
3/16	1/4	.203	.296	13/32	780-010	780-038	780-042	CFA/BCF
3/16	5/16	.265	.359	15/32	780-011		780-043	CFA/BCF
3/16	3/8	.328	.421	17/32	780-012	780-039	780-044	CFA/BCF
3/16	7/16	.390	.484	19/32	780-013		780-045	CFA/BCF
3/16	1/2	.453	.546	21/32	780-014		780-046	CFA/BCF
1/4	1/8	.078	.171	9/32	780-021		780-047	CFA/BCF
1/4	3/16	.140	.234	11/32	780-022		780-048	CFA/BCF
1/4	1/4	.203	.296	13/32	780-023		780-049	CFA/BCF
1/4	5/16	.265	.359	15/32	780-024		780-050	CFA/BCF
1/4	3/8	.328	.421	17/32	780-025		780-051	CFA/BCF
1/4	7/16	.390	.484	19/32	780-026		780-052	CFA/BCF
1/4	1/2	.453	.546	21/32	780-027		780-054	CFA/BCF

RIVET DIA.	GRIP RANGE		RIVET DIA.	LINER HEAD
	Min.	Max.		
3/16	.075	.175	9/32	780-054
3/16	.175	.275	25/64	780-055
3/16	.275	.375	31/64	780-056
3/16	.375	.475	37/64	780-057
3/16	.475	.575	11/16	780-058
3/16	.575	.675	25/32	780-059
3/16	.675	.775	7/8	780-060
3/16	.775	.875	63/64	780-061
3/16	.875	.975	1-5/64	780-062

- ALUMINUM "LINER" HEAD RIVET with tamper-proof drive in pin of Stainless Steel
- For fastening plywood or plastic liners in T.I.R. containers
- Large diameter, low profile head increases bearing surface and eliminates cargo snagging

